

# TANDEM CASTER WHEEL REPAIR KIT INSTRUCTIONS

**WARNING:** Failure to install the tandem caster wheel repair kit could result in your stroller tipping.



Your Repair Kit contains two front wheels. Follow the instructions below for correct installation.



**STEP 1** - Remove the front wheel by pressing the button, as shown and pulling the wheel off.




**STEP 2** - Attach the new front wheel provided in the Repair Kit and push into the front wheel location until a “click” is heard. Tug firmly on the wheel to be sure it is securely in place.

Repeat the same operations for the other wheel.

# NUT REPAIR KIT INSTRUCTIONS

**WARNING:** Failure to install the Nut repair kit could result in the nut falling off and becoming a choking hazard for your child.

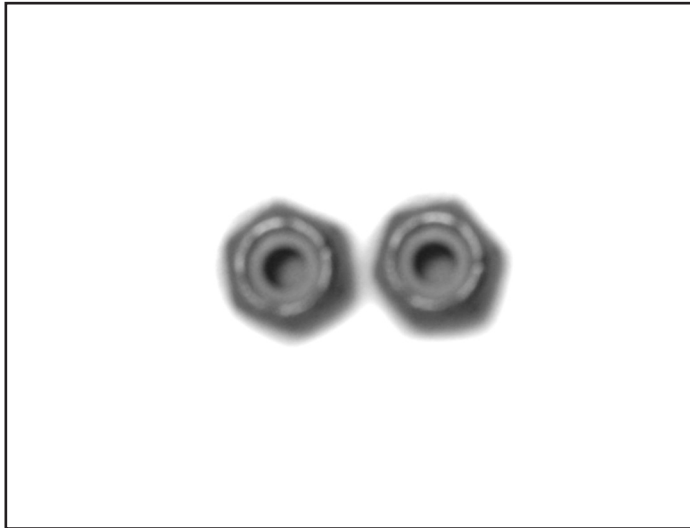

Your repair kit contains two Nylon-lock nuts. Follow the instructions below for correct installation.



**STEP 1** - Remove the rear side of the Cargo Basket, by detaching the snap buttons.



**STEP 2** - Remove the exposed nut by using a wrench.



**STEP 3** - Attach the new nylon-lock nut by fingers only.



**STEP 4** - Use a wrench to tighten the nut until flush with the bolt end. Repeat this operation for the other side of the stroller.



**STEP 5** - Re-attach the cargo basket, using the snap buttons.